



Samsung Blast Keyboard Replacement

This guide will demonstrate how to replace the keyboard of a Samsung Blast.

Written By: Jordan Taylor





TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Pair of Hands](#) (1)



PARTS:

- [Samsung blast keyboard assembly](#) (1)

Step 1 — At a Glance




- Your phone should look like this before disassembly.

Step 2 — Battery Case Removal



- Remove the battery cover by sliding the back panel up, this will expose the battery.

Step 3 — Remove Battery/Sim card

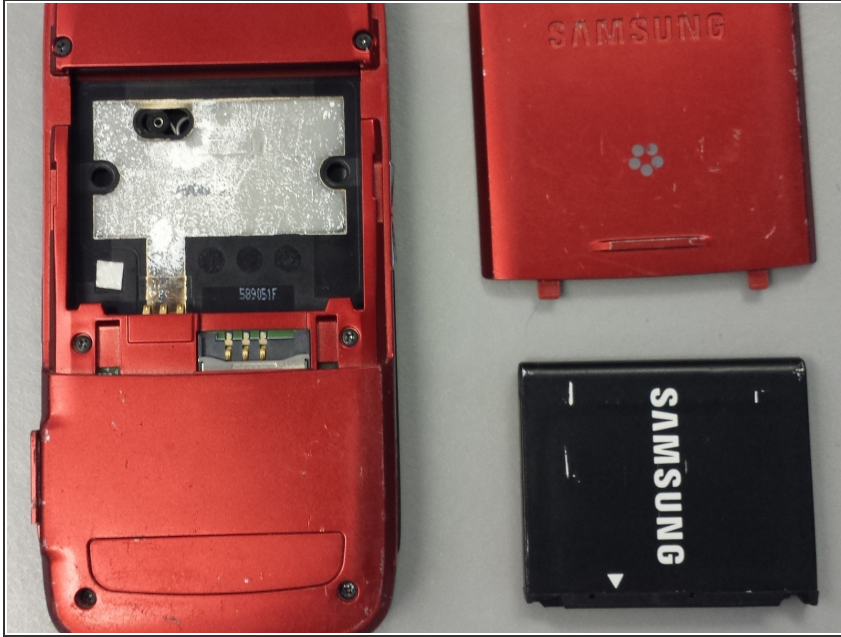


- Lift up the top portion of the battery and pull it out.
- Next, slide the sim card out of its socket and set it aside.

Step 4 — Back Case Removal




- Use Phillips #00 Screwdriver to unscrew the six small screws that secure the back of the case
 - ⓘ Note: The top two screws are connected to the back cover, they will not come off once unscrewed.
- Remove the case by prying around the edges.
 - ⓘ Note the positions of button pads for reassembly.

Step 5 — Button Pads

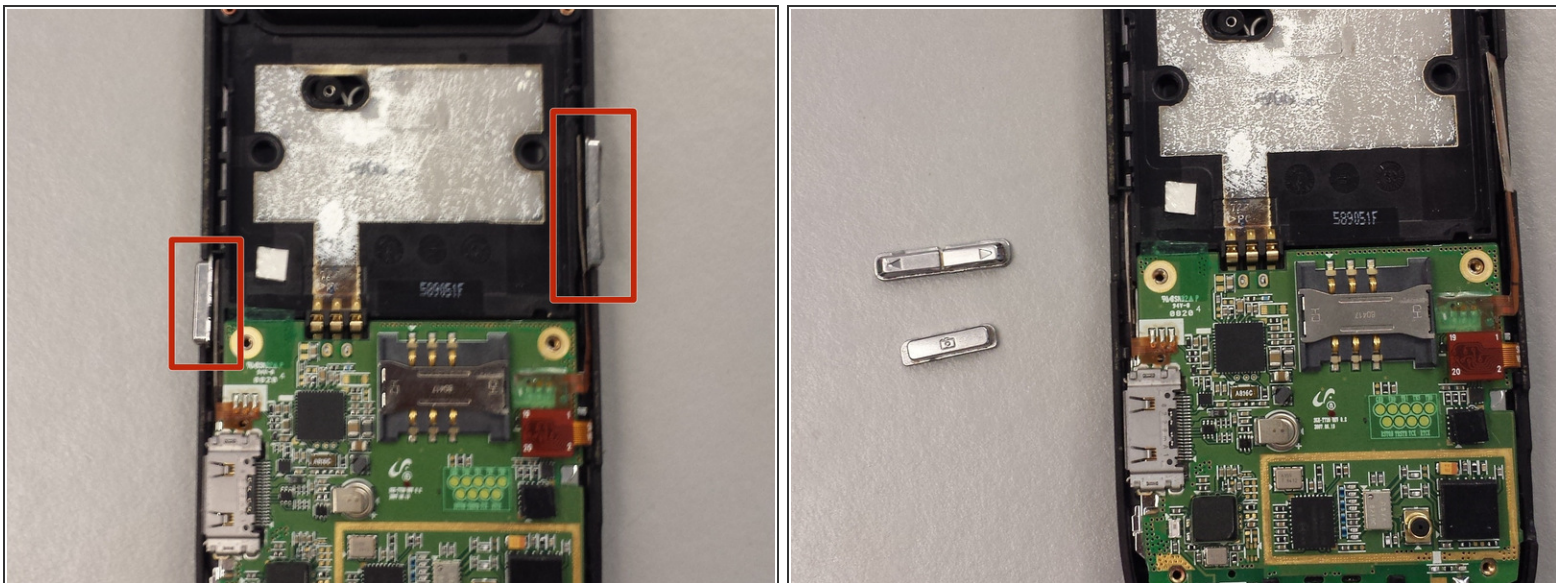



- Remove the buttons for the camera and volume.

Step 6 — Motherboard Removal

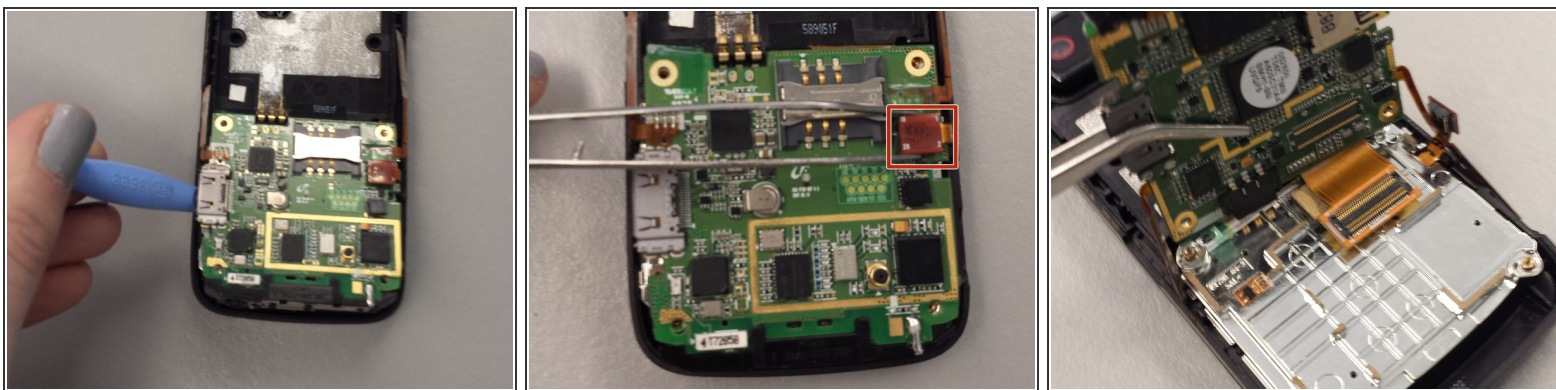

- Use a prying tool to detach the motherboard from main body.
- Carefully detach the motherboard from the two connectors.
- ⓘ You could also use a pry tool for the second step.
- ⚠ Be careful with the motherboard as not to scrape or damage its components.

Step 7 — Keyboard Pad Replacement

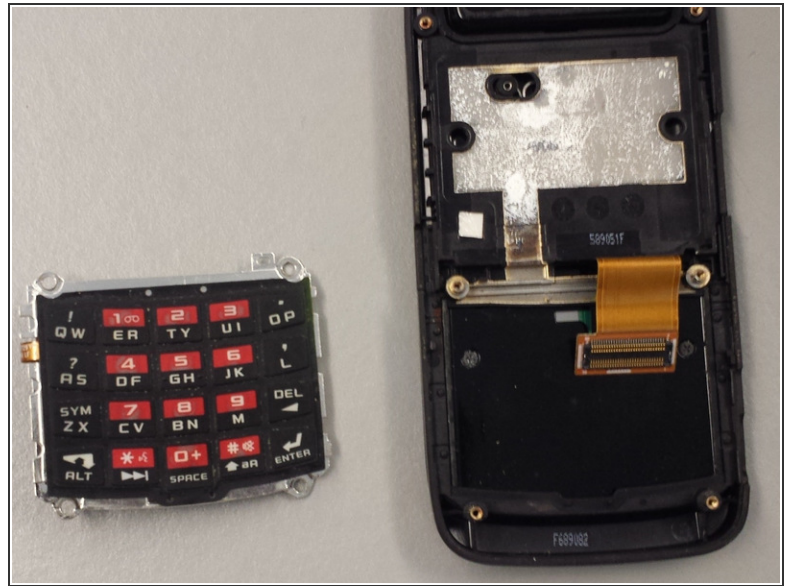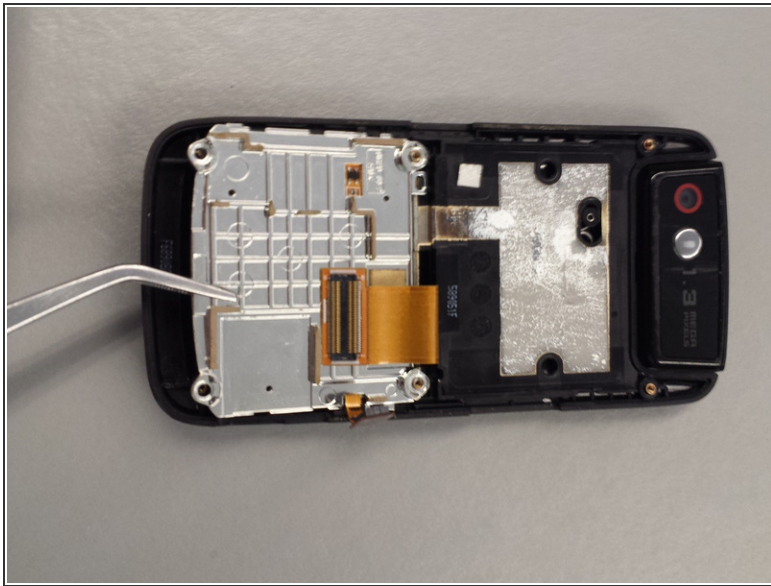

- Slide the keyboard straight up to free it from its alignment pins.
- ☑ Swap the broken keyboard with a replacement here, and follow the repair steps in reverse order for reassembly.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 02:22:01 PM.